


BRIDA LOCA

Aplicación:

Utilizadas para unión de tubería polietileno con accesorios extremos bridados.

Especificaciones:

- Cuerpo: Hierro Dúctil ASTM A536
- Acabado: Pintura Epoxica Azul

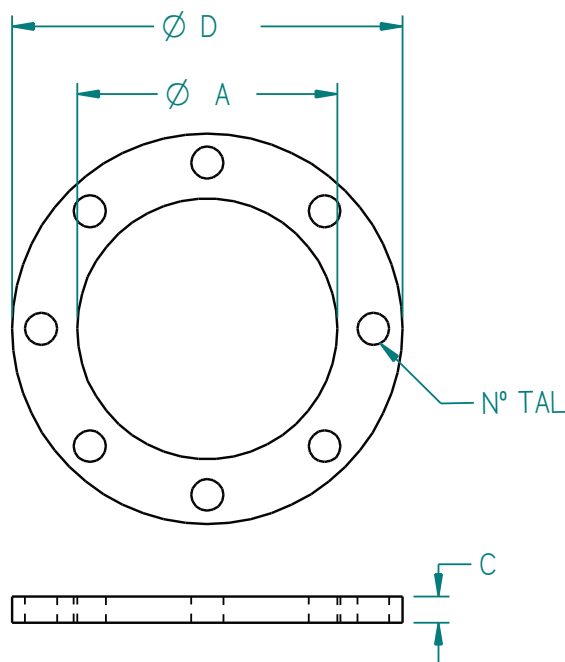

DIAMETRO NOMINAL	ØA	C	ØD	N°TAL	TIPO BRIDA				
pulg.	mm	mm	mm		PN6	PN10	PN16	PN25	ANSI150
2"	78	19	158	4		x	x		x
3"	108	19	195	8	x	x	x	x	x
4"	135	19	225	8		x	x		x
6"	188	19	282	8		x	x		x
8"	238	20	340	8		x			x
8"	238	20	340	12			x		
10"	288	22	405	12		x	x		x
12"	288	24	475	12		x	x		x
14"	376	24	515	16		x	x		
14"	376	24	515	12					x
16"	430	28	590	16		x	x		x
18"	517	30	640	20		x	x		
18"	517	30	640	16					x
20"	533	31.5	710	20		x	x		x
24"	645	36	830	20		x	x		x

