


## Reducción Extremo Brida

### Especificaciones:

- Cuerpo: Hierro Fundido ASTM A-126 Clase B  
Presión de trabajo: 150 psi
- Cuerpo: Hierro Nodular ASTM A-536  
Presión de trabajo: 250 psi
- Acabado: Pintura Epóxica azul
- Norma AWWA C 110
- Brida: Tipo ANSI B16.1

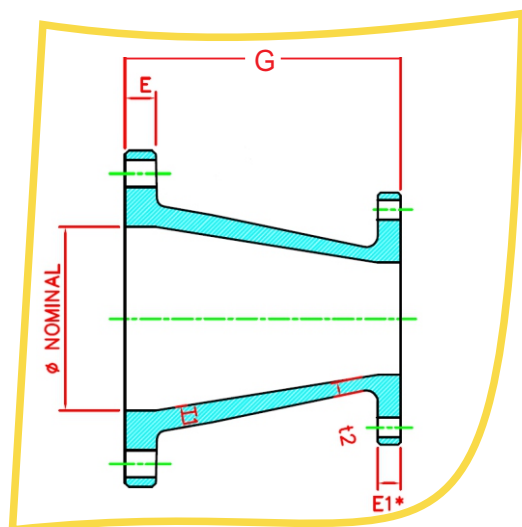

### DIMENSIONES GENERALES (mm)

DIAM. NOMINAL													
Pulg.	mm	E	G	T1	3"	4"	6"	8"	10"	12"	14"	16"	18"
					t2	t2	t2	t2	t2	t2	t2	t2	t2
2	50	-	-	-									
3	75	19.0	-	-									
4	100	23.8	177.8	7.5	7.5								
6	150	25.4	228.6	8	7.5	7.5							
8	200	28.6	279.4	8.5		7.5	8						
10	250	30.1	304.8	9		7.5	8	8.5					
12	300	31.8	355.6	9.5		7.5	8	8.5	9				
14	350	32.4	406.4	11			8	8.5	9	9.5			
16	400	36.5	457.2	12			8	8.5	9	9.5	11		
18	450	39.7	482.6	13				8.5	9	9.5	11	12	
20	500	42.8	508	13					9	9.5	11	12	13

puede revisar si el documento esta actualizado en  
[www.ideacolombia.com/listadodoc.pdf](http://www.ideacolombia.com/listadodoc.pdf)