


CO-DC-29 V4
F. ACT. 03/03/2020

Reducción Extremo Liso

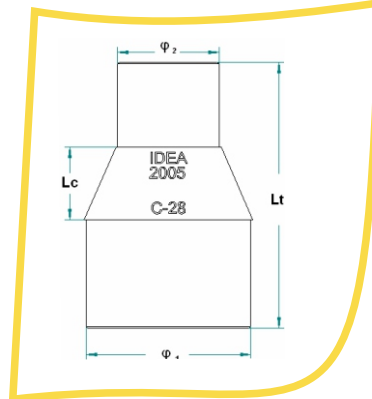

Especificaciones:

- Cuerpo: Hierro Fundido ASTM A-126
Presión de trabajo: 150 psi
- Cuerpo: Hierro Nodular ASTM A-536
Presión de trabajo: 250 psi
- Acabado: Pintura Epóxica azul
- Norma AWWA C153
- Extremo liso

DIMENSIONES GENERALES (mm y grados)

Diam Nominal				Lc												
Pulg	mm	Espesor	Espigo	2	3	4	6	8	10	12	14	16	18			
2	60	8	90	120												
3	89	8.4	110	110												
4	114	8.7	120	100	90											
6	168	9.2	140	150	80	60										
8	219	9.7	160		120	110	70									
10	273	14	180		150	140	120	100								
12	323	10.2	200		170	160	140	120	100							
14	355	12	215				230	180	130	130						
16	406	12.7	235				280	230	180	130	105					
18	457	13.7	255					330	254	177	152	127				
20	508	14.5	275						355	304	254	177	101			

Diam Nominal		Lt										
Pulg	mm	2	3	4	6	8	10	12	14	16	18	
3	89	320										
4	114	320	320									
6	168	330	330	320								
8	219	400	390	390	370							
10	273		440	440	440	440						
12	323		480	480	480	480	480					
14	355				585	555	525	545				
16	406				655	625	595	565	555			
18						745	689	632	622	617		
20							810	779	744	687	631	

puede revisar si el documento esta actualizado en
www.ideacolombia.com/listadodoc.pdf



www.ideacolombia.com
negocios@ideacolombia.com
Calle 45 N° 16-35 Bucaramanga - Colombia
PBX: 57 - 7- 6522037

