


INDUSTRIAL DE ACCESORIOS S.A.S.


CO-DC-20 V7
F. ACT. 13/08/2024

Cruz Extremo Liso

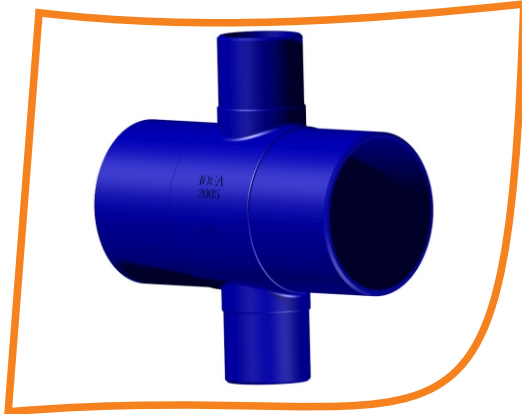

Especificaciones:

- Cuerpo: Hierro Nodular ASTM A - 536
Presión de trabajo: 250 psi
- Acabado: Pintura Epóxica azul
- Norma AWWA C153
- Extremo liso para PVC

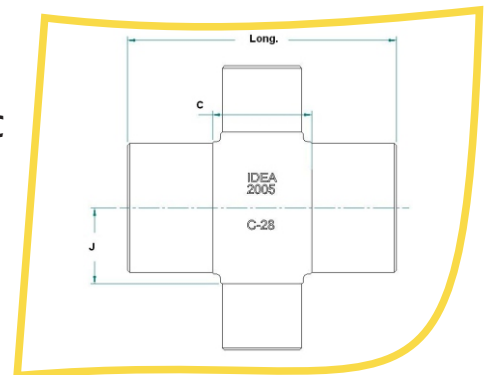

DIMENSIONES GENERALES (mm)

DN pulg	Φ E mm	ESPIGO	
		PVC	J
2	60	90	55
3	89	105	76
4	114	115	101
6	168	135	127
8	219	150	165
10	273	180	190
12	323	200	222
14	355	215	260
16	406	235	290
18	457	245	315
20	508	275	355
24	610	290	410

	C											
	2	3	4	6	8	10	12	14	16	18	20	24
110												
110	152											
110	178	202										
110	178	202	254									
110	190	202	254	330								
	190	202	254	330	380							
	190	202	254	330	380	440						
		280	330	380	430	480	520					
			330	380	430	480	520	580				
			330	380	430	480	520	580	630			
			330	406	456	500	560	608	660	710		
			330	406	456	500	560	608	660	710	820	

Diam Nominal		Longitud total ESPIGO PVC											
DN Pulg	Φ E mm	2	3	4	6	8	10	12	14	16	18	20	24
2	60	290											
3	89	330	372										
4	114	350	418	442									
6	168	390	458	482	534								
8	219	430	510	522	574	650							
10	273		550	562	614	690	740						
12	323		590	602	654	730	780	840					
14	355			710	760	810	860	910	950				
16	406				800	850	900	950	990	1050			
18	457				840	890	940	990	1030	1090	1140		
20	508				880	956	1006	1050	1110	1158	1210	1260	
24	610				930	1006	1056	1100	1160	1208	1260	1310	1420

Puede revisar si el documento esta actualizado en
www.ideacolombia.com/listadodoc.pdf



www.ideacolombia.com
negocios@ideacolombia.com
Calle 45 N° 16-35 Bucaramanga - Colombia
PBX: 57 - 7- 6522037

